Westinghouse

2-OUTLET DAILY DIGITAL BAR TIMER

2-PRISE BARRE NUMÉRIQUE QUOTIDIENNE TEMPORISATEURS

Customer Service / Service à la Clientèle
1-855-350-6868 • 10AM - 6PM, EST
Monday to Friday / Lundi au Vendredi

MODEL / MODÈLE #28426

⚠ WARNING

NOTE: THIS EQUIPMENT HAS BEEN TESTED AND FOUND TO COMPLY WITH THE LIMITS FOR A CLASS B DIGITAL DEVICE, PURSUANT TO PART 15 OF THE FCC RULES. THESE LIMITS ARE DESIGNED TO PROVIDE REASONABLE PROTECTION AGAINST HARMFUL INTERFERENCE IN A RESIDENTIAL INSTALLATION. THIS EQUIPMENT GENERATES, USES AND CAN RADIATE RADIO FREQUENCY ENERGY AND, IF NOT INSTALLED AND USED IN ACCORDANCE WITH THE INSTRUCTIONS, MAY CAUSE HARMFUL INTERFERENCE TO RADIO COMMUNICATIONS. HOWEVER, THERE IS NO GUARANTEE THAT INTERFERENCE WILL NOT OCCUR IN A PARTICULAR INSTALLATION. IF THIS EQUIPMENT DOES CAUSE HARMFUL INTERFERENCE TO RADIO OR TELEVISION RECEPTION, WHICH CAN BE DETERMINED BY TURNING THE EQUIPMENT OFF AND ON, THE USER IS ENCOURAGED TO TRY TO CORRECT THE INTERFERENCE BY ONE OR MORE OF THE FOLLOWING MEASURES, REORIENT OR RELOCATE THE RECEIVING ANTENNA, INCREASE THE SEPARATION BETWEEN THE EQUIPMENT AND RECEIVER, CONNECT THE EQUIPMENT INTO AN OUTLET ON A CIRCUIT DIFFERENT FROM THAT TO WHICH THE RECEIVER IS CONNECTED, OR CONSULT THE DEALER OR AN EXPERIENCED RADIO/TV TECHNICIAN FOR HELP.

SPECIFICATIONS

2 polarized outlets
Rated:
120VAC/60Hz/8A/960W Resistive
5A/600W Tungsten
500VA Electronic Ballast

ITEM #H28426

ENGLISH

WHAT THIS TIMER DOES:

Your timer can be programmed to turn a lamp or other electric device on and off automatically, once per day.Before using the timer, make sure that the lamp works by plugging it into the wall outlet. While the lamp is on, unplug it from the wall. Plug the lamp into the timer and plug the timer into the wall. Your timer will turn your lamp on and off automatically. Before initial use, please plug in your timer for at least 1 hour to charge the internal battery. After the LCD display appears, your unit will be ready for programming.

OPERATING INSTRUCTIONS

1 TO SET TO THE CURRENT TIME:

Press and hold the TIME button. While holding, press the HOUR button until the current hour is displayed. Continuously pressing the HOUR/MINUTE button will cycle the time from AM to PM.

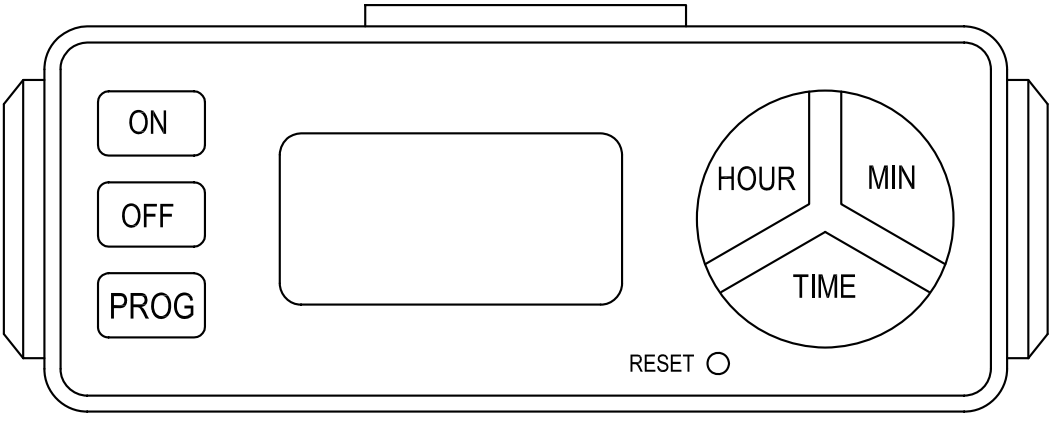

2 PROGRAM SETTING

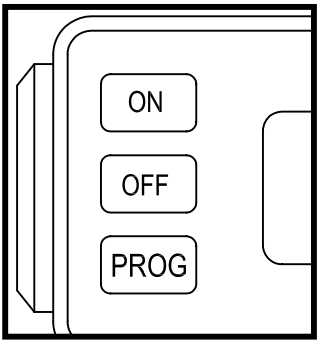

- Press the PROG button to select Program 1 or Program 2.
- While holding down the ON button press the HOUR and MIN buttons to set the timer's "on" time.
- While holding down the OFF button press the HOUR and MIN buttons to set the timer's "off" time.

- Press the TIME button or wait 15 seconds for the timer to save your program settings and exit to the main screen (current time).

3 PROGRAM SETTING

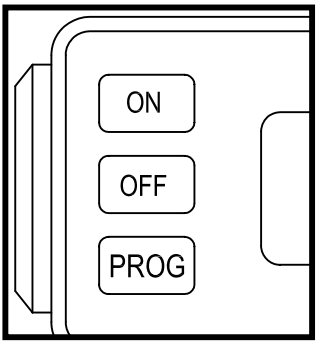

- Press and hold the PROG button to select Program 1 or Program 2.
- Press and hold the ON button to review the programmed “on” time Press and hold the OFF button to review the programmed “off” time.

TIMER MODES

Press the button on top of the timer to cycle through Continuous On, Continuous Off, or Automatic Timer modes.

⚠ AVERTISSEMENTS

REMARQUE: CET ÉQUIPEMENT A ÉTÉ TESTÉ ET TROUVÉ CONFORME AUX LIMITES POUR UN APPAREIL NUMÉRIQUE DE CLASSE B CONFORMÉMENT À LA PARTIE 15 DU RÈGLEMENT DE LA FCC. CES LIMITES SONT CONÇUES POUR OFFRIR UNE PROTECTION RAISONNABLE CONTRE LE BROUILLAGE PRÉJUDICIABLE DANS UNE INSTALLATION RÉSIDENTIELLE. CET ÉQUIPEMENT PRODUIT, UTILISE ET PEUT ÉMETTRE DE L'ÉNERGIE DE FRÉQUENCE RADIO ET, S'IL N'EST PAS INSTALLÉ ET UTILISÉ CONFORMÉMENT AUX INSTRUCTIONS, PEUT OCCASIONNER UN BROUILLAGE PRÉJUDICIABLE AUX COMMUNICATIONS RADIO. CEPENDANT, IL N'EXISTE AUCUNE GARANTIE À L'EFFET QU'UNE INSTALLATION PARTICULIÈRE NE PRODUIRA AUCUN BROUILLAGE. SI CET ÉQUIPEMENT PRODUIT UN BROUILLAGE PRÉJUDICIABLE À LA RÉCEPTION RADIO-PHONIQUE OU TÉLÉVISUELLE, CE QUE VOUS POUVEZ DÉTERMINER EN METTANT L'ÉQUIPEMENT EN ET HORS CIRCUIT, NOUS ENCOURAGEONS L'UTILISATEUR À ESSAYER DE CORRIGER LE BROUILLAGE D'UNE OU DE PLUSIEURS DES FAÇONS
SUIVANTES, RÉORIENTER OU REPOSITIONNER L'ANTENNE DE RÉCEPTION, AUGMENTER LA SÉPARATION ENTRE L'ÉQUIPEMENT ET LE RÉCEPTEUR, BRANCHER L'ÉQUIPE-MENT DANS LA PRISE D'UN CIRCUIT AUTRE QUE CELUI AUQUEL LE RÉCEPTEUR EST BRANCHÉ OU CONSULTER LE MARCHAND OU UN TECHNICIEN DE LA RADIO OU DE LA TÉLÉVISION CHEVRONNÉ.

CARACTÉRISTIQUES

2 prises polarisée
Calibré à: 120VAC/60Hz/
8A/960W Resistif
5A/600W Tungstène
500VA Ballast Électronique

ARTICLE #H28426

FRENCH

CE QUE FAIT CETTE MINUTERIE:
Votre minuterie peut être programmée pour allumer une lampe ou mettre en marche et arrêter un appareil électrique, une fois par jour. Avant d'utiliser la minuterie, assurez-vous que la lampe fonctionne en la branchant dans la prise murale. Lorsque la lampe est allumée, débranchez-la de la prise murale.
Branchez la lampe dans la minuterie et branchez la minuterie dans la prise murale. Votre minuterie allumera et éteindra la lampe automatiquement. Avant la première utilisation, veuillez brancher votre compteur pour au moins 1 heure pour charger la batterie interne. Après l'écran LCD apparaît, votre unité sera prêt pour la programmation.

MODE D'OPÉRATION

1 POUR RÉGLER À L'HEURE COURANTE:

Appuyez et maintenez enfoncé le bouton TIME. Tout en maintenant, appuyez sur le bouton d'heure jusqu'à ce que l'heure actuelle est affichée. Lorsque vous appuyez sur le bouton HOUR/MINUTE continuellement changements de temps de cycle de AM à PM.

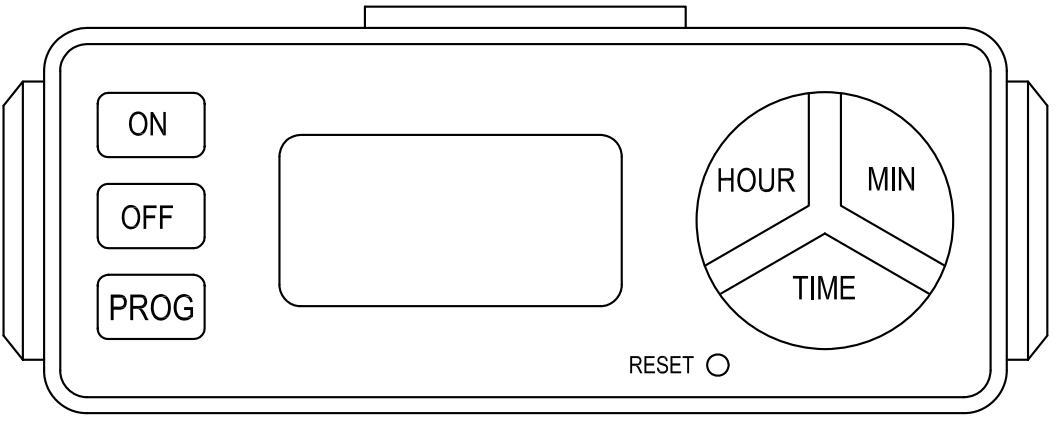

2 CADRE DU PROGRAMME

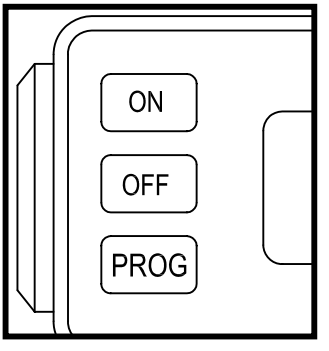

- Appuyez sur le bouton PROG pour sélectionner le programme 1 ou 2.
- Tout en maintenant enfoncé le bouton ON appuyez sur le boutons HOUR et MIN pour régler la minuterie de temps “marche”.
- Tout en maintenant la pression sur le bouton OFF les boutons HOUR et MIN pour régler l’heure “off” de la minuterie.
- Appuyez sur le bouton TIME ou attendre 15 secondes pourque la minuterie pour enregistrer vos paramètres du programme et la sortie à l’écran principal (heure actuelle).

3 EXAMEN DES PROGRAMMES



- Appuyez et maintenez enfoncé le bouton PROG pour sélectionner le programme 1 ou programme 2.
- Appuyez et maintenez le bouton ON pour examiner la valeur programmée “sur” le temps.
- Appuyez et maintenez enfoncé le bouton OFF pour examiner le temps programmé “off”

MODES DE MINUTERIE

Appuyez sur le bouton sur le dessus de la minuterie pour faire défiler en continu On, Off continue, ou modes de minuterie automatique.

MODE DE SÉCURITÉ INSTRUCTIONS:

Appuyez sur le bouton d’ON ET OFF en même temps. Le symbole SEC semblera sur l’étalage de LCD, en indiquant que la caractéristique de sécurité a été permis.

Dans le Mode de Sécurité, le compte-minutes contrôle votre éclairage/artifices au hasard pour donner l’apparence que quelqu’un est à la maison.

Rendre infirme, appuyer sur le bouton d’ON et OFF en même temps. Le symbole SEC disparaîtra en indiquant que la caractéristique de sécurité a été rendue infirme.

SECURITY MODE INSTRUCTIONS:

Press the ON and OFF button at the same time. The SEC symbol will appear on the LCD display, indicating that the security feature has been enabled.

In Security Mode, the timer controls your lighting/devices randomly to give the appearance that someone is home.

To disable, press the ON and OFF button at the same time. The SEC symbol will disappear indicating that the security feature has been disabled.

---

and WESTINGHOUSE are trademarks of Westinghouse Electric Corporation. Used under license by The NCC. All rights reserved.

Les termes et WESTINGHOUSE sont des marques de commerce de la société Westinghouse Electric. Utilisés sous licence par la société The NCC. Tous droits réservés.

Manufactured and distributed by /
Manufacturé et distribué par:
The NCC, Brooklyn, NY 11223
1.855.350.6868
www.westinghouseacpower.com
©2019 The NCC
MADE IN CHINA /FABRIQUÉ EN CHINE